





INSTRUCTION GUIDE

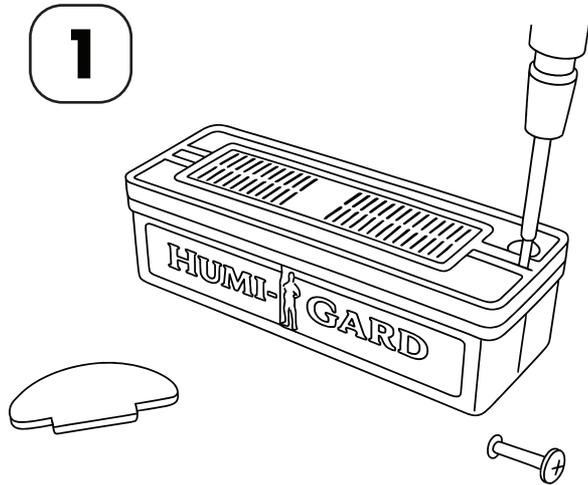


Remove the Filler Plug first (1/4 Turn by hand). Then remove the screws.


(Use a #2 Philips head screw driver, do not use a screw gun.)

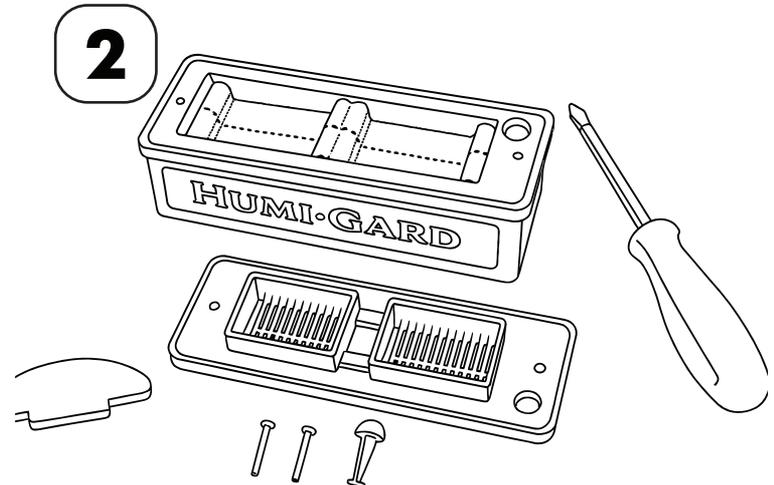

Remove the vented top plate.

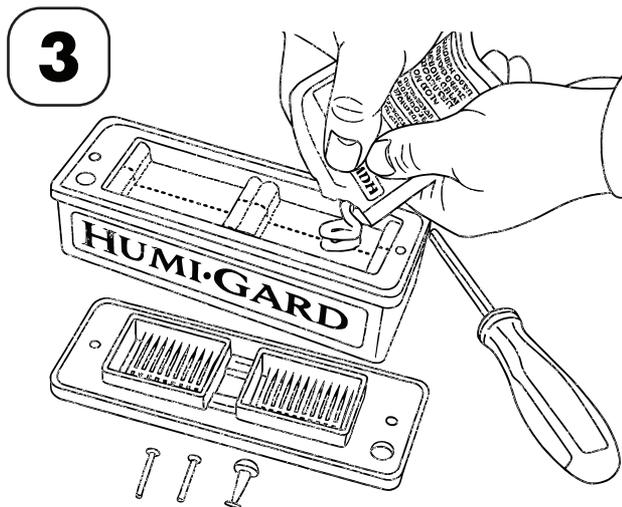

Select the evaporation paste you wish to use (Red 64-65%, Yellow 67-68%, Blue 70-71%). There are two packets for every color and you may need both. Cut off the corner with a pair of scissors, and fill both top trays of the Evaporation Chamber.

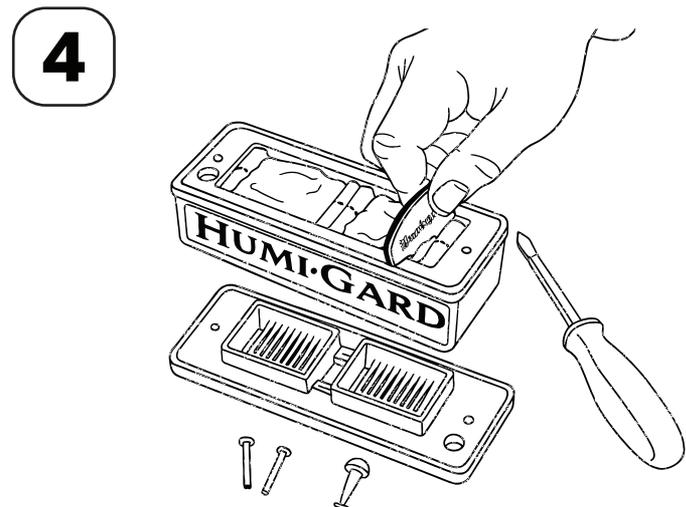


Use the Trowel provided to set the paste to the right depth. You can move paste from one side to the other, if necessary, to make sure both sides cover the wick evenly.



INSTRUCTION GUIDE (CONTINUED)

Do not use distilled water, do not use glycol solution.


To avoid mold, and bacteria on the cotton wick, you must use a natural antimicrobial product that will not affect the aroma of the cigars.

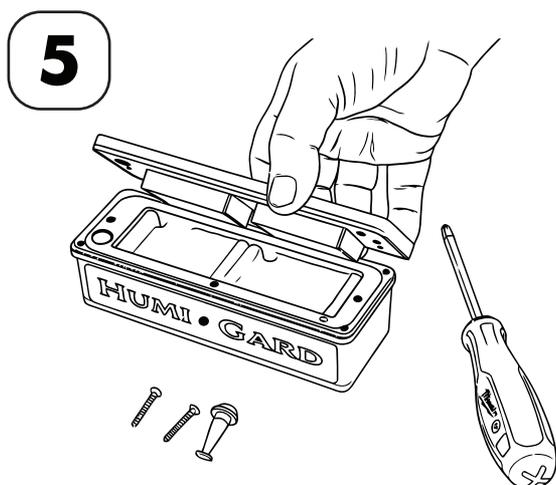


Replace the top vent and replace the screws (use a screw driver only, do not use a screw gun).
DO NOT OVER TIGHTEN!



Fill the tank, no higher than the max fill line, **using only Cedar Cigar Fluid.**

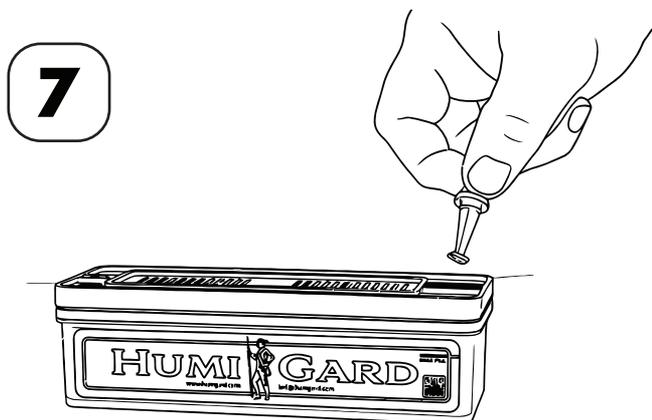

Replace the Fluid Filler Plug with a quarter turn (finger tighten only).

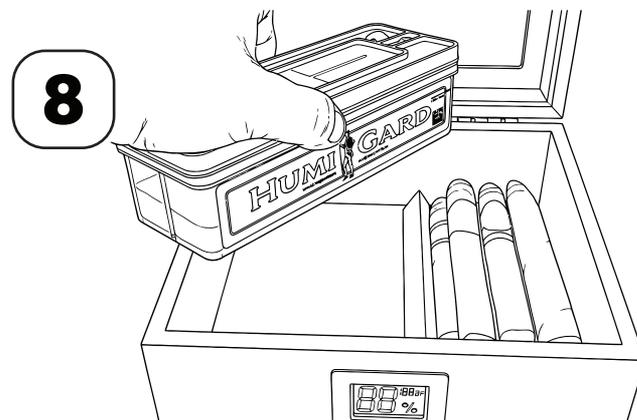

Place the humigard in the lower half of the humidor. Once the humigard is set up, it must be kept upright to avoid faulty results.